

SNIFE CLASS RACING ASSOCIATION

MEASUREMENT DATA SHEET FOR CERTIFIED BOATS

Revised February 2019

This page to be used for all boats. *For measurements in Italic refer to the Class Rules*


HULL NUMBER	31622	BUILDER	Tsujiido
MODEL	Tsujiido	YEAR OF MANUFACTURE	2020
OWNER	TATUYA TAKAYAMA	COUNTRY	Japan

BARE HULL	<input type="checkbox"/>	COMPLETE	<input checked="" type="checkbox"/>	INCOMPLETE	<input type="checkbox"/>
HULL MATERIAL: WOOD	<input type="checkbox"/>	FIBERGLASS	<input checked="" type="checkbox"/>	make note of	
DECK MATERIAL: WOOD	<input type="checkbox"/>	FIBERGLASS	<input checked="" type="checkbox"/>	incomplete items	
FROM CERTIFIED MOULD	<input checked="" type="checkbox"/>			filling the cells with NO	


HULL WEIGHT (min 125kg)	127.6	MAST LENGTH (Rules C.9.2, F.3.4)	6499
TOTAL WEIGHT (min 172.8kg)	172.8	Limiting marks & pin	<input checked="" type="checkbox"/>
CORRECTOR WEIGHTS (max 15kg)	7.3	Corrector weights (max 100gr)	<input type="checkbox"/>
MOI	271	BOOM LENGTH (max 2642mm)	2639
Spring set #	#95	Limiting marks & pin	<input checked="" type="checkbox"/>
JIB FITTING	280	POLE LENGTH (max 2642mm)	2600
(279-330mm hor. From Hull Datum Point)		RUDDER DIMENSIONS	<input checked="" type="checkbox"/>
max 45mm vert. above sheerline)		Weigth (min. 2.72kg)	3.45
SHROUDS (1778-1981mm from HDP)	1789	Corrector weights (Rule C.8.5)	<input type="checkbox"/>
MAST HOLE (min 1494-mm from HDP)	1494	Parallel to transom (tolerance 2mm)	<input checked="" type="checkbox"/>
UPPER GUDGEON (Rule D.2.3)	408	DAGGERBOARD DIMENSIONS	<input checked="" type="checkbox"/>
LOWER GUDGEON (Rule D.2.3)	154	Band	<input checked="" type="checkbox"/>
GUDGEONS DIAMETER (Rule D.2.3)	8.0	Safety line (max 610mm long)	<input checked="" type="checkbox"/>
		Restraining system (hooks or tablet)	<input checked="" type="checkbox"/>

Insert the **actual** measurement in the cells marked as

Mark corrector weights position and amount below. Data to be copied on the Official Snipe Label

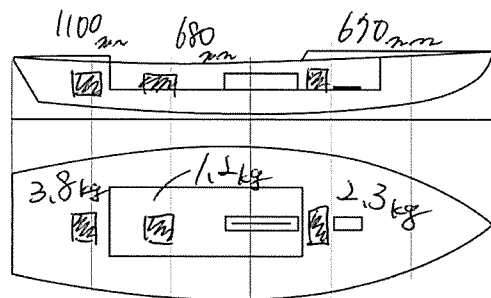

Mast: Factory zero
Boom: Factory zero



DATE MEASURED 6-JAN-2020 MEASURER'S STAMP

01 SCIRA
MEASURER
JAPAN

MEASURER'S NAME

NOTES:

Snipe Class International Racing Association

M. Sawai

SCIRA Measurement Data Sheet

To be used with the 80/20 true baseline measurement frame

For boats built from January 1st, 2018. For older boats use the MDS in force in the year of manufacturing

Owner JATSUYA TAKAYAMA Date 6 Jan - 2020

Hull 3/622 Builder TSUJIBO Material FRP

NEW MOULD: FIRST OR OF 5 CERTIFICATION RENEW Y/N

DO NOT COMPLETE IF FROM A CERTIFIED MOULD

Chine						
Station	Height				Width	
	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1	427	427	854	838-864	535	527-540
2	372	374	746	724-749	991	991-1003
3	350	345	695	673-699	1233	1232-1245
4	353	349	702	680-705	1275	1270-1283
5	388	392	780	762-787	1144	1137-1149
Transom	454	459	913	902-927	956	952-965

Sheer						
Station	Height				Width	
	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1	766	763	1529	1499-1549	917	895-921
2	712	712	1424	1391-1441	1364	1346-1372
3	679	676	1355	1333-1384	1525	1511-1537
4	669	668	1337	1321-1372	1494	1473-1499
5	674	678	1352	1321-1372	1294	1270-1295
Transom	694	698	1392	1384-1435	1036	1022-1048

Keel				
Station	Height		Width	
	Actual	Allowable Range	Actual	Allowable Range
400mm	224	223-235		
1		162	80	Min 51
2	87	89-101	102	99-105
3	62	51-63	103	99-105
4	68	58-70	101	99-105
5		114	103	99-105
Transom	168	166-178	103	99-105

Stem Offset		
up from baseline	back from HDP	Actual
267	267-279	269
305	194-206	197
337	153-165	155
381	108-120	109
457	54-66	55
527	26-38	27
311 to 387	intersection of chine extension	

Miscellaneous					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
LOA	4722	4711-4737	Chine radius at st. 1	✓	Max 19
Horizontal transom offset	203	203-229	Chine radius st. 2 to transom	✓	Max 3
Hull Datum Point height	703	683-708	Deck height	107	Max 127
Bow radius	✓	Max 25	Cockpit width	680	Max 1016

Topside Measurements					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
Aft end of daggerboard slot from Hull datum point	2460	2438-2464	Heel point to sheer (vertical)	393	390-400
Top of case parallel to baseline	0	tolerance 2	Mast hole in the deck	150 x 60	Max 256x76
Aft edge of slot perpendicular to baseline	0	tolerance 2	Length of foredeck	1861	Min 1842
Forward edge of slot perpendicular to baseline	0	tolerance 6	Length of aft deck	1140	Min 457
Keel to top of daggerboard case	313	310-313	Sheer strikes	✓	Max 32
Length of daggerboard slot	530	Max 546	Gunwale radius	✓	Max 12
Width of daggerboard slot	12	Max 13	Splashboard	65 x 800	Min 51 x 610

Measurer

Stamp nr.