

SNIFE CLASS RACING ASSOCIATION

MEASUREMENT DATA SHEET FOR CERTIFIED BOATS

Revised February 2019

This page to be used for all boats. *For measurements in Italic refer to the Class Rules*


HULL NUMBER	31811	BUILDER	TSUJIDO RACING
MODEL	JRC-1	YEAR OF MANUFACTURE	2022
OWNER	Junichro Shiraish	COUNTRY	Japan

BARE HULL	<input type="checkbox"/>	COMPLETE	<input checked="" type="checkbox"/>	INCOMPLETE	<input type="checkbox"/>
HULL MATERIAL: WOOD	<input type="checkbox"/>	FIBERGLASS	<input checked="" type="checkbox"/>	make note of	
DECK MATERIAL: WOOD	<input type="checkbox"/>	FIBERGLASS	<input checked="" type="checkbox"/>	incomplete items	
FROM CERTIFIED MOULD	<input type="checkbox"/>			filling the cells with NO	

HULL WEIGHT (min 125kg)	125.4	MAST LENGTH (Rules C.9.2, F.3.4)	6499
TOTAL WEIGHT (min 172.8kg)	172.8	Limiting marks & pin	<input checked="" type="checkbox"/>
CORRECTOR WEIGHTS (max 15kg)	13.22	Corrector weights (max 100gr)	<input checked="" type="checkbox"/>
MOI	271	BOOM LENGTH (max 2642mm)	2642
Spring set #	#95	Limiting marks & pin	<input checked="" type="checkbox"/>
JIB FITTING	281	POLE LENGTH (max 2642mm)	2641
(279-330mm hor. From Hull Datum Point)		RUDDER DIMENSIONS	<input checked="" type="checkbox"/>
max 45mm vert. above sheerline)		Weight (min. 2.72kg)	282
SHROUDS (1778-1981mm from HDP)	1778	Corrector weights (Rule C.8.5)	0
MAST HOLE (min 1494-mm from HDP)	1495	Parallel to transom (tolerance 2mm)	<input checked="" type="checkbox"/>
UPPER GUDGEON (Rule D.2.3)	411	DAGGERBOARD DIMENSIONS	<input checked="" type="checkbox"/>
LOWER GUDGEON (Rule D.2.3)	156	Band	<input checked="" type="checkbox"/>
GUDGEONS DIAMETER (Rule D.2.3)	8	Safety line (max 610mm long)	<input checked="" type="checkbox"/>
		Restraining system (hooks or tablet)	<input checked="" type="checkbox"/>


Insert the **actual** measurement in the cells marked as

Mark corrector weights position and amount below. Data to be copied on the Official Snipe Label

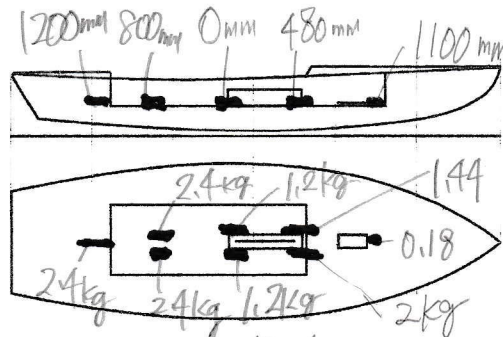

MAST: Factory zero

BOOM: Factory zero



DATE MEASURED 14-Aug-2022 MEASURER'S STAMP

MEASURER'S NAME Kuniko Yamada

NOTES:

04 SCIRA
MEASURER
JAPAN

SCIRA Measurement Data Sheet

To be used with the 80/20 true baseline measurement frame

For boats built from January 1st, 2018. For older boats use the MDS in force in the year of manufacturing

Owner Junichiro Shiraishi Date 14-Aug-2022
 Hull 31811 Builder Tsujido Racing Material FRP

NEW MOULD: FIRST OR 2 OF 5 CERTIFICATION RENEW Y/N

DO NOT COMPLETE IF FROM A CERTIFIED MOULD

-6

Chine						
	Height				Width	
Station	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1	427	427	854	838-864	528	527-540
2	374	370	744	724-749	991	991-1003
3	341	339	680	673-699	1233	1232-1245
4	347	345	692	680-705	1276	1270-1283
5	383	382	768	762-787	1138	1137-1149
Transom	452	452	904	902-927	953	952-965

Sheer						
	Height				Width	
Station	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1	775	768	1543	1499-1549	903	895-921
2	720	712	1432	1391-1441	1365	1346-1372
3	685	678	1363	1333-1384	1536	1511-1537
4	677	668	1345	1321-1372	1494	1473-1499
5	677	672	1352	1321-1372	1270	1270-1295
Transom	696	695	1391	1384-1435	1025	1022-1048

31811 14-Aug.-2022

Keel				
Station	Height		Width	
	Actual	Allowable Range	Actual	Allowable Range
400mm		223-235		
1		162	73	Min 51
2	101	89-101	99	99-105
3	63	51-63	101	99-105
4	67	58-70	101	99-105
5		114	101	99-105
Transom	167	166-178	103	99-105

Stem Offset		
up from baseline	back from HDP	Actual
267	267-279	268
305	194-206	199
337	153-165	156
381	108-120	111
457	54-66	58
527	26-38	30
311 to 387	intersection of chine extension	

Miscellaneous					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
LOA	4734	4711-4737	Chine radius at st. 1		Max 19
Horizontal transom offset	203	203-229	Chine radius st. 2 to transom		Max 3
Hull Datum Point height	708	683-708	Deck height	125	Max 127
Bow radius		Max 25	Cockpit width	701	Max 1016

Topside Measurements					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
Aft end of dagg. slot from Hull datum point	2457	2438-2464	Heel point to sheer (vertical)	394	390-400
Top of case parallel to baseline	2	tolerance 2	Mast hole in the deck	150 x60	Max 256x76
Aft edge of slot perpendicular to baseline	0	tolerance 2	Length of foredeck	1865	Min 1842
Forward edge of slot perpendicular to baseline	3	tolerance 6	Length of aft deck	1089	Min 457
Keel to top of daggerboard case	313	310-313	Sheer strikes	29	Max 32
Length of daggerboard slot	540	Max 546	Gunwale radius		Max 12
Width of daggerboard slot	12	Max 13	Splashboard	71 x 700	Min 51 x 610

Measurer

Kuniko Yamada

Stamp nr.

04 SCIRA
MEASURER
JAPAN