

SNIFE CLASS RACING ASSOCIATION

MEASUREMENT DATA SHEET FOR CERTIFIED BOATS

Revised February 2019

This page to be used for all boats. *For measurements in Italic refer to the Class Rules*



| | | | |
|-------------|---------------|---------------------|--------|
| HULL NUMBER | 31833 | BUILDER | DIEMER |
| MODEL | G4 | YEAR OF MANUFACTURE | 2022 |
| OWNER | MARIO TAVARES | COUNTRY | Brazil |

| | | | | | |
|----------------------|--------------------------|------------|--------------------------|----------------------------------|--------------------------|
| BARE HULL | <input type="checkbox"/> | COMPLETE | <input type="checkbox"/> | INCOMPLETE | <input type="checkbox"/> |
| HULL MATERIAL: WOOD | <input type="checkbox"/> | FIBERGLASS | <input type="checkbox"/> | make note of | |
| DECK MATERIAL: WOOD | <input type="checkbox"/> | FIBERGLASS | <input type="checkbox"/> | incomplete items | |
| FROM CERTIFIED MOULD | <input type="checkbox"/> | | | filling the cells with NO | |

| | | | |
|--|-------------------------------------|--------------------------------------|-------------------------------------|
| HULL WEIGHT (min 125kg) | 128.4kg | MAST LENGTH (Rules C.9.2, F.3.4) | <input checked="" type="checkbox"/> |
| TOTAL WEIGHT (min 172.8kg) | 172.8kg | Limiting marks & pin | <input checked="" type="checkbox"/> |
| CORRECTOR WEIGHTS (max 15kg) | 6.6kg | Corrector weights (max 100gr) | <input type="checkbox"/> |
| MCI | 271.6 | BOOM LENGTH (max 2642mm) | <input checked="" type="checkbox"/> |
| Spring set # | # 89 | Limiting marks & pin | <input checked="" type="checkbox"/> |
| JIB FITTING | <input checked="" type="checkbox"/> | POLE LENGTH (max 2642mm) | <input checked="" type="checkbox"/> |
| (279-330mm hor. From Hull Datum Point) | | RUDDER DIMENSIONS | <input checked="" type="checkbox"/> |
| max 45mm vert. above sheerline) | | Weight (min. 2.72kg) | 3.1kg |
| SHROUDS (1778-1981mm from HDP) | <input checked="" type="checkbox"/> | Corrector weights (Rule C.8.5) | <input type="checkbox"/> |
| MAST HOLE (min 1494-mm from HDP) | <input checked="" type="checkbox"/> | Parallel to transom (tolerance 2mm) | <input checked="" type="checkbox"/> |
| UPPER GUDGEON (Rule D.2.3) | <input checked="" type="checkbox"/> | DAGGERBOARD DIMENSIONS | <input checked="" type="checkbox"/> |
| LOWER GUDGEON (Rule D.2.3) | <input checked="" type="checkbox"/> | Band | <input checked="" type="checkbox"/> |
| GUDGEONS DIAMETER (Rule D.2.3) | <input checked="" type="checkbox"/> | Safety line (max 610mm long) | <input checked="" type="checkbox"/> |
| | | Restraining system (hooks or tablet) | <input checked="" type="checkbox"/> |

Insert the **actual** measurement in the cells marked as

Mark corrector weights position and amount below. Data to be copied on the Official Snipe Label

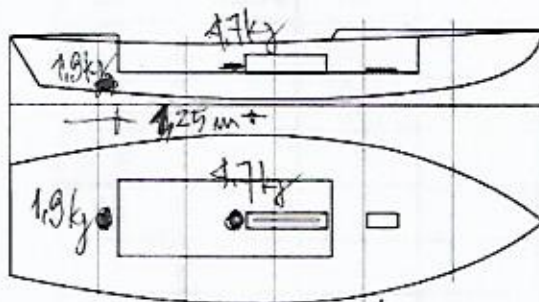

DATE MEASURED 07/19/23 MEASURER'S STAMP

MEASURER'S NAME MARIO TAVARES

NOTES:

01 SCIRA
MEASURER
BRAZIL

31833

| Keel | | | | |
|---------|--------|-----------------|--------|-----------------|
| Station | Height | | Width | |
| | Actual | Allowable Range | Actual | Allowable Range |
| 400mm | | 223-235 | | |
| 1 | | 162 | | Min 51 |
| 2 | | 89-101 | | 99-105 |
| 3 | | 51-63 | | 99-105 |
| 4 | | 58-70 | | 99-105 |
| 5 | | 114 | | 99-105 |
| Transom | | 166-178 | | 99-105 |

| Stem Offset | | |
|------------------|---------------------------------|--------|
| up from baseline | back from HDP | Actual |
| 267 | 267-279 | |
| 305 | 194-206 | |
| 337 | 153-165 | |
| 381 | 108-120 | |
| 457 | 54-66 | |
| 527 | 26-38 | |
| 311 to 387 | intersection of chine extension | |

| Miscellaneous | | | | | |
|---------------------------|--------|-----------------|-------------------------------|--------|-----------------|
| Measurement | Actual | Allowable Range | Measurement | Actual | Allowable Range |
| LOA | | 4711-4737 | Chine radius at st. 1 | | Max 19 |
| Horizontal transom offset | | 203-229 | Chine radius st. 2 to transom | | Max 3 |
| Hull Datum Point height | | 683-708 | Deck height | | Max 127 |
| Bow radius | | Max 25 | Cockpit width | | Max 1016 |

| Topside Measurements | | | | | |
|--|--------|-----------------|--------------------------------|--------|-----------------|
| Measurement | Actual | Allowable Range | Measurement | Actual | Allowable Range |
| Aft end of dagg. slot from Hull datum point | ✓ | 2438-2464 | Heel point to sheer (vertical) | 39,15 | 390-400 |
| Top of case parallel to baseline | ✓ | tolerance 2 | Mast hole in the deck | ✓ | Max 256x76 |
| Aft edge of slot perpendicular to baseline | ✓ | tolerance 2 | Length of foredeck | ✓ | Min 1842 |
| Forward edge of slot perpendicular to baseline | ✓ | tolerance 6 | Length of aft deck | ✓ | Min 457 |
| Keel to top of daggerboard case | 313 | 310-313 | Sheer strikes | ✓ | Max 32 |
| Length of daggerboard slot | ✓ | Max 546 | Gunwale radius | | Max 12 |
| Width of daggerboard slot | ✓ | Max 13 | Splashboard | ✓ | Min 51 x 610 |

Measurer *Mario Mendes*

Stamp nr. **01** SCIRA MEASURER BRAZIL