

# SNIPE CLASS RACING ASSOCIATION

## MEASUREMENT DATA SHEET FOR CERTIFIED BOATS

Revised February 2019

*This page to be used for all boats. For measurements in **Italic** refer to the Class Rules*



HULL NUMBER 32001 BUILDER MAS GONIP  
 MODEL DB R.d. YEAR OF MANUFACTURE 2026  
 OWNER ALEX DIAZ COUNTRY USA

BARE HULL ☐ COMPLETE ☐ INCOMPLETE ☒  
 HULL MATERIAL: WOOD ☐ FIBERGLASS ☐ make note of  
 DECK MATERIAL: WOOD ☐ FIBERGLASS ☐ incomplete items  
 filling the cells with **NO**  
 FROM CERTIFIED MOULD ☐

|                                        |             |                                      |                                     |
|----------------------------------------|-------------|--------------------------------------|-------------------------------------|
| HULL WEIGHT (min 125kg)                | <u>127</u>  | MAST LENGTH (Rules C.9.2, F.3.4)     | <u>6500</u>                         |
| TOTAL WEIGHT (min 172.8kg)             |             | Limiting marks & pin                 | <input checked="" type="checkbox"/> |
| CORRECTOR WEIGHTS (max 15kg)           |             | Corrector weights (max 100gr)        | <u>NO</u>                           |
| MOI                                    |             | BOOM LENGTH (max 2642mm)             | <u>2589</u>                         |
| Spring set #                           |             | Limiting marks & pin                 | <input checked="" type="checkbox"/> |
| JIB FITTING                            |             | POLE LENGTH (max 2642mm)             | <u>2640</u>                         |
| (279-330mm hor. From Hull Datum Point) |             | RUDDER DIMENSIONS                    | <input checked="" type="checkbox"/> |
| max 45mm vert. above sheerline)        |             | Weight (min. 2.72kg)                 | <u>3.01</u>                         |
| SHROUDS (1778-1981mm from HDP)         | <u>1778</u> | Corrector weights (Rule C.8.5)       | <u>NO</u>                           |
| MAST HOLE (min 1494-mm from HDP)       | <u>1494</u> | Parallel to transom (tolerance 2mm)  | <input checked="" type="checkbox"/> |
| UPPER GUDGEON (Rule D.2.3)             | <u>412</u>  | DAGGERBOARD DIMENSIONS               | <input checked="" type="checkbox"/> |
| LOWER GUDGEON (Rule D.2.3)             | <u>156</u>  | Band                                 | <input checked="" type="checkbox"/> |
| GUDGEONS DIAMETER (Rule D.2.3)         | <u>8</u>    | Safety line (max 610mm long)         | <input type="checkbox"/>            |
|                                        |             | Restraining system (hooks or tablet) | <input type="checkbox"/>            |

Insert the **actual** measurement in the cells marked as ☐

Mark corrector weights position and amount below. Data to be copied on the Official Snipe Label

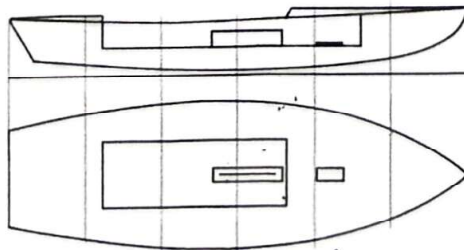

DATE MEASURED 27/07/26 MEASURER'S STAMP

MEASURER'S NAME ROSCHAI GIOVANNI

NOTES:

12 SCIRA  
Measurer  
ITALY

Snipe Class International Racing Association

## SCIRA Measurement Data Sheet

To be used with the 80/20 true baseline measurement frame

For boats built from January 1st, 2018. For older boats use the MDS in force in the year of manufacturing

Owner DUGIE DIAZ Date 27/07/26  
 Hull 32081 Builder HAS GROUP Material FIBERGLASS

NEW MOULD: FIRST ☐ OR ☐ OF 5 CERTIFICATION RENEW ☐ Y/N

DO NOT COMPLETE IF FROM A CERTIFIED MOULD

| Chine   |           |      |       |                 |        |                 |
|---------|-----------|------|-------|-----------------|--------|-----------------|
|         | Height    |      |       |                 | Width  |                 |
| Station | Starboard | Port | Total | Allowable Range | Actual | Allowable Range |
| 1       |           |      |       | 838-864         |        | 527-540         |
| 2       |           |      |       | 724-749         |        | 991-1003        |
| 3       |           |      |       | 673-699         |        | 1232-1245       |
| 4       |           |      |       | 680-705         |        | 1270-1283       |
| 5       |           |      |       | 762-787         |        | 1137-1149       |
| Transom |           |      |       | 902-927         |        | 952-965         |

| Sheer   |           |      |       |                 |        |                 |
|---------|-----------|------|-------|-----------------|--------|-----------------|
|         | Height    |      |       |                 | Width  |                 |
| Station | Starboard | Port | Total | Allowable Range | Actual | Allowable Range |
| 1       |           |      |       | 1499-1549       |        | 895-921         |
| 2       |           |      |       | 1391-1441       |        | 1346-1372       |
| 3       |           |      |       | 1333-1384       |        | 1511-1537       |
| 4       |           |      |       | 1321-1372       |        | 1473-1499       |
| 5       |           |      |       | 1321-1372       |        | 1270-1295       |
| Transom |           |      |       | 1384-1435       |        | 1022-1048       |

12 SCIRA  
 Measurer  
 ITALY

Snipe Class International Racing Association

27/07/26

HULL 32081

SCIRA MDS Rev. "J-d" - July 2019

| Keel    |        |                 |        |                 |
|---------|--------|-----------------|--------|-----------------|
| Station | Height |                 | Width  |                 |
|         | Actual | Allowable Range | Actual | Allowable Range |
| 400mm   |        | 223-235         |        |                 |
| 1       |        | 162             |        | Min 51          |
| 2       |        | 89-101          |        | 99-105          |
| 3       |        | 51-63           |        | 99-105          |
| 4       |        | 58-70           |        | 99-105          |
| 5       |        | 114             |        | 99-105          |
| Transom |        | 166-178         |        | 99-105          |

| Stem Offset      |                                 |        |
|------------------|---------------------------------|--------|
| up from baseline | back from HDP                   | Actual |
| 267              | 267-279                         |        |
| 305              | 194-206                         |        |
| 337              | 153-165                         |        |
| 381              | 108-120                         |        |
| 457              | 54-66                           |        |
| 527              | 26-38                           |        |
| 311 to 387       | intersection of chine extension |        |

| Miscellaneous             |        |                 |                               |        |                 |
|---------------------------|--------|-----------------|-------------------------------|--------|-----------------|
| Measurement               | Actual | Allowable Range | Measurement                   | Actual | Allowable Range |
| LOA                       |        | 4711-4737       | Chine radius at st. 1         |        | Max 19          |
| Horizontal transom offset |        | 203-229         | Chine radius st. 2 to transom |        | Max 3           |
| Hull Datum Point height   |        | 683-708         | Deck height                   |        | Max 127         |
| Bow radius                |        | Max 25          | Cockpit width                 |        | Max 1016        |

| Topside Measurements                           |        |                 |                                |         |                 |
|------------------------------------------------|--------|-----------------|--------------------------------|---------|-----------------|
| Measurement                                    | Actual | Allowable Range | Measurement                    | Actual  | Allowable Range |
| Aft end of dagger slot from Hull datum point   |        | 2438-2464       | Heel point to sheer (vertical) | 393     | 390-400         |
| Top of case parallel to baseline               |        | tolerance 2     | Mast hole in the deck          | 70 x 60 | Max 256x76      |
| Aft edge of slot perpendicular to baseline     |        | tolerance 2     | Length of foredeck             |         | Min 1842        |
| Forward edge of slot perpendicular to baseline |        | tolerance 6     | Length of aft deck             |         | Min 457         |
| Keel to top of daggerboard case                | 313    | 310-313         | Sheer strikes                  |         | Max 32          |
| Length of daggerboard slot                     | 522    | Max 546         | Gunwale radius                 |         | Max 12          |
| Width of daggerboard slot                      | 12     | Max 13          | Splashboard                    |         | Min 51 x 610    |

Measurer *TOSCANI GIOVANNI*

22/02/26

12 SCIRA  
Stampa pr. Measurer  
ITALY  
Snipe Class International Racing Association