

SCIRA Measurement Data Sheet

To be used with the 80/20 true baseline measurement frame

For boats built from January 1st, 2018. For older boats use the MDS in force in the year of manufacturing

Owner DOUG HART Date 22/07/26Hull 320B7 Builder HMS GROUP Material FIBERGLASSNEW MOULD: FIRST ☐ OR ☐ OF 5 CERTIFICATION RENEW ☐ Y/N

DO NOT COMPLETE IF FROM A CERTIFIED MOULD

Chine						
	Height				Width	
Station	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1				838-864		527-540
2				724-749		991-1003
3				673-699		1232-1245
4				680-705		1270-1283
5				762-787		1137-1149
Transom				902-927		952-965

Sheer						
	Height				Width	
Station	Starboard	Port	Total	Allowable Range	Actual	Allowable Range
1				1499-1549		895-921
2				1391-1441		1346-1372
3				1333-1384		1511-1537
4				1321-1372		1473-1499
5				1321-1372		1270-1295
Transom				1384-1435		1022-1048

Snipe Class International Racing Association

22/07/26

SCIRA
12
Measurer
ITALY

HULL 32087

SCIRA MDS Rev. "J-d" - July 2019

Keel				
Station	Height		Width	
	Actual	Allowable Range	Actual	Allowable Range
400mm		223-235		
1		162		Min 51
2		89-101		99-105
3		51-63		99-105
4		58-70		99-105
5		114		99-105
Transom		166-178		99-105

Stem Offset		
up from baseline	back from HDP	Actual
267	267-279	
305	194-206	
337	153-165	
381	108-120	
457	54-66	
527	26-38	
311 to 387	intersection of chine extension	

Miscellaneous					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
LOA		4711-4737	Chine radius at st. 1		Max 19
Horizontal transom offset		203-229	Chine radius st. 2 to transom		Max 3
Hull Datum Point height		683-708	Deck height		Max 127
Bow radius		Max 25	Cockpit width		Max 1016

Topside Measurements					
Measurement	Actual	Allowable Range	Measurement	Actual	Allowable Range
Aft end of dagg. slot from Hull datum point		2438-2464	Heel point to sheer (vertical)	394	390-400
Top of case parallel to baseline		tolerance 2	Mast hole in the deck	120 x 60	Max 256x76
Aft edge of slot perpendicular to baseline		tolerance 2	Length of foredeck		Min 1842
Forward edge of slot perpendicular to baseline		tolerance 6	Length of aft deck		Min 457
Keel to top of daggerboard case	311	310-313	Sheer strikes		Max 32
Length of daggerboard slot	522	Max 546	Gunwale radius		Max 12
Width of daggerboard slot	13	Max 13	Splashboard		Min 51 x 610

Measurer TOSSANI GIOVANNI

Stamp nr.

12 SCIRA
Measurer
ITALY

Snipe Class International Racing Association

22/02/26

SNIPE CLASS RACING ASSOCIATION

MEASUREMENT DATA SHEET FOR CERTIFIED BOATS

Revised February 2019

This page to be used for all boats. For measurements in *Italic* refer to the Class Rules



HULL NUMBER 32087 BUILDER HAS GROUP
 MODEL DBR 1 YEAR OF MANUFACTURE 2026
 OWNER DOUG FIART COUNTRY USA

BARE HULL ☐ COMPLETE ☒ INCOMPLETE ☐
 HULL MATERIAL: WOOD ☐ FIBERGLASS ☒ make note of
 DECK MATERIAL: WOOD ☐ FIBERGLASS ☒ incomplete items
 filling the cells with **NO**
 FROM CERTIFIED MOULD ☒

HULL WEIGHT (min 125kg)	<u>NO</u>	MAST LENGTH (Rules C.9.2, F.3.4)	<u>6500</u>
TOTAL WEIGHT (min 172.8kg)	<u>172.9</u>	Limiting marks & pin	☒
CORRECTOR WEIGHTS (max 15kg)	<u>8.5</u>	Corrector weights (max 100gr)	<u>NO</u>
MOI	<u>277.9</u>	BOOM LENGTH (max 2642mm)	<u>2585</u>
Spring set #	<u>NO</u>	Limiting marks & pin	☒
JIB FITTING		POLE LENGTH (max 2642mm)	<u>2640</u>
(279-330mm hor. From Hull Datum Point)		RUDDER DIMENSIONS	
max 45mm vert. above sheerline)		Weight (min. 2.72kg)	<u>3.01</u>
SHROUDS (1778-1981mm from HDP)	<u>1778</u>	Corrector weights (Rule C.8.5)	<u>NO</u>
MAST HOLE (min 1494-mm from HDP)	<u>1494</u>	Parallel to transom (tolerance 2mm)	☒
UPPER GUDGEON (Rule D.2.3)	<u>412</u>	DAGGERBOARD DIMENSIONS	
LOWER GUDGEON (Rule D.2.3)	<u>156</u>	Band	☒
GUDGEONS DIAMETER (Rule D.2.3)	<u>8</u>	Safety line (max 610mm long)	☒
		Restraining system (hooks or tablet)	☒

Insert the **actual** measurement in the cells marked as ☐

Mark corrector weights position and amount below. Data to be copied on the Official Snipe Label

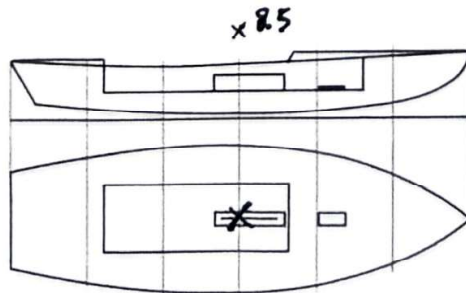

DATE MEASURED 27/07/26 MEASURER'S STAMP

MEASURER'S NAME TOSSANI GIOVANNI

NOTES:

12 SCIRA
 Measurer
 ITALY

Snipe Class International Racing Association